



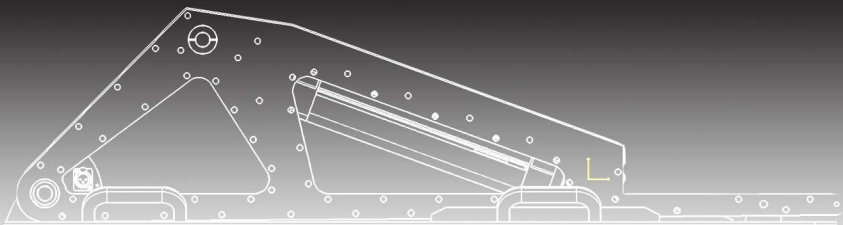

AIRRAM

toolman custom
Custom Mechatronics

www.toolmancustom.com
info@toolmancustom.com
+49 (30) 610 730 11

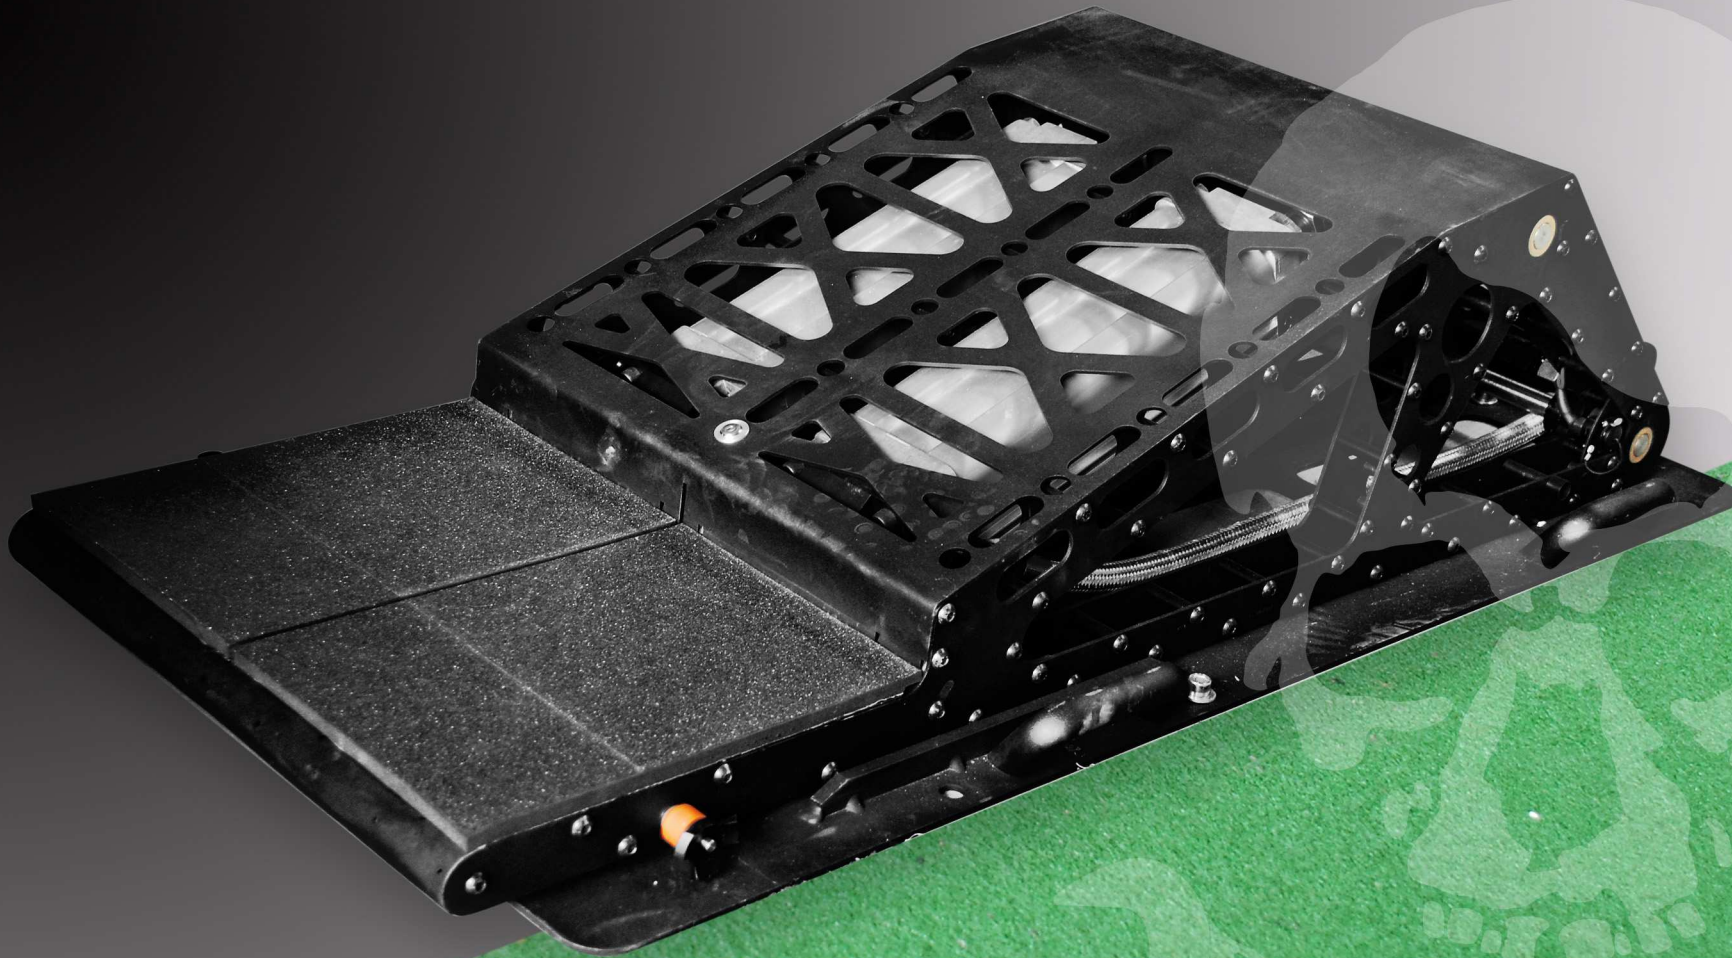

This AirRam is our version of the well known stunt device, in which we have added some features like a filigree sandwich frame. The moving part of the AirRam is weight optimized. This stunt catapult is triggered by a pneumatic device. The intensity of the jump is adjusted via air pressure. The maximum operating pressure is 18 bar and allows a soft boarding with progressive acceleration. High and long distance jumps are possible with relatively low pressure. This AirRam is equipped with a durable sintered bearing bush and the flat-face couplings prevent any contamination of the pneumatic system.




AIRRAM

toolman custom
Custom Mechatronics

www.toolmancustom.com
info@toolmancustom.com
+49 (30) 610 730 11




open AirRam – high pressure cylinders
filigree sandwich construction

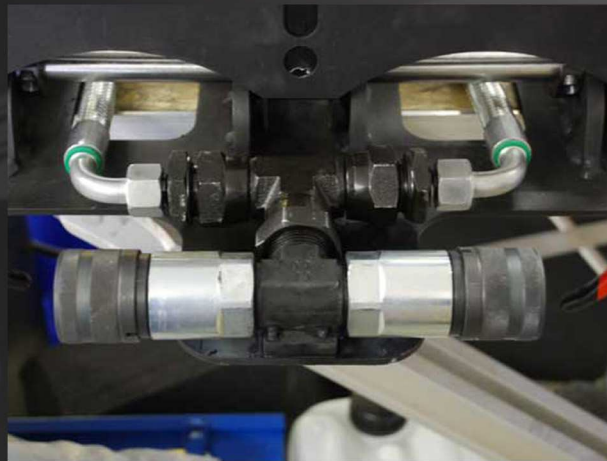

flat-face couplings in two directions
durable and safe



sintered bearings
xlr output for firing box

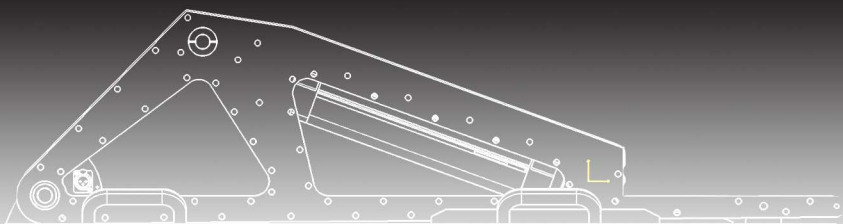

TECHNICAL SPECIFICATIONS

Pressure:	max 18 bar	Surface: zink coated and black-chromated
H x L x D:	0,3m x 1,2m x 0,48m	
Weight:	45 kg	